

Ameron™ Centrecon S-Series Round Pole

Available in base plate and embedded styles.

Our S-Series poles are well suited for light duty applications such as shopping centers, parking lots, green belts and similar areas. Application can be post top or side mounted. Ameron poles are constructed with the highest quality materials and workmanship to ensure uniformity and long term structural integrity.

Features and Benefits

- Prestressed steel and highest quality concrete are centrifugally cast for ultimate strength, durability, and vibration resistance
- Natural stone and terrazzo aggregates maintain a like-new appearance with virtually no maintenance
- Conforms to applicable sections of ACI, AASHTO, ASTM and PCI standards
- Exclusive 10-year warranty

Colors and Finishes

A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are lightly blasted to expose the texture and beauty of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amershield™, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

Durability with a classic touch.




For further information contact us at: 1.800.552.6376



nov.com/poleproducts

Ameron™ Centrecon S-Series Round Pole

3-1/2" TOP O.D.

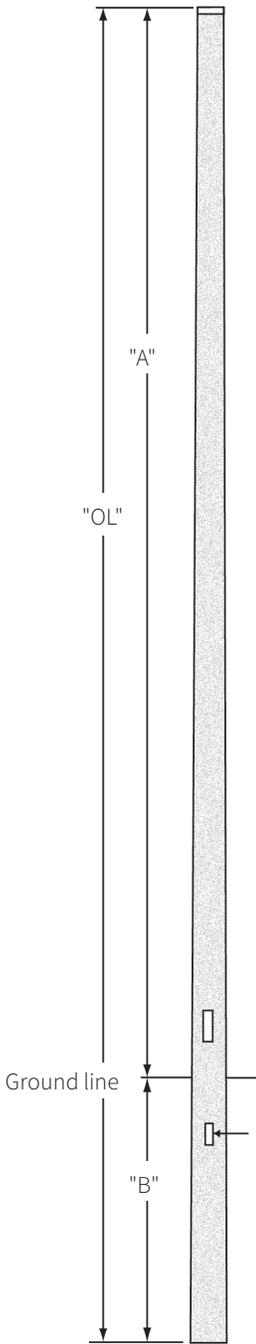

Base plate style - information

Catalog Number	Pole Height "A"	Base OD	Anchor Bolt	Bolt circle (in.)	Base plate	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
SBR03.4	11'-1"	5-5/16"	3/4" x 24" x 4"	10"	9"	6,100	180
SBR04	13'-1"	5-5/8"	3/4" x 24" x 4"	10"	9"	6,960	200
SBR04.3	14'-1"	5-5/8"	3/4" x 24" x 4"	10"	9"	7,080	230
SBR05	16'-5"	6-1/8"	3/4" x 24" x 4"	10"	9"	8,400	300
SBR05.5	18'-0"	6-7/16"	3/4" x 24" x 4"	10"	9"	9,180	350
SBR06	19'-8"	6-11/16"	3/4" x 24" x 4"	10"	9"	9,960	400
SBR07	23'-0"	7-3/16"	3/4" x 24" x 4"	10"	9"	11,630	470
SBR08.3	27'-3"	7-7/8"	3/4" x 24" x 4"	10"	9"	12,300	580


Embedded style - information

Catalog Number	Pole Height "A"	Base OD	Embedded Depth "B"	Overall Length OL	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
SER02.5	8'-2"	5-5/16"	2'-11"	11'-1"	4,200	160
SER03	9'-10"	5-5/8"	3'-3"	13'-1"	5,120	180
SER04	13'-1"	6-1/8"	3'-4"	16'-5"	6,960	280
SER04.3	14'-0"	6-3/8"	4'-0"	18'-0"	7,080	330
SER05	16'-5"	6-11/16"	3'-7"	20'-0"	8,400	380
SER06	19'-8"	7-5/16"	3'-11"	23'-7"	9,960	450
SER07	23'-0"	7-7/8"	4'-3"	27'-3"	11,630	550


Specifications: Use Centrecon Specifications

Colors and finishes: See Centrecon color selection guide


Luminaire mounting: See Mounting Options section for more information



Base plate prestressed to pole



Shaft cross section detail

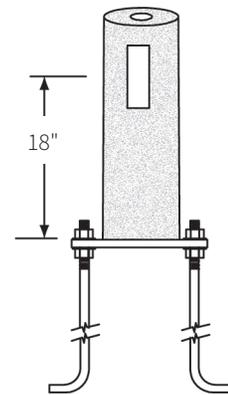

SBR elevation
See recommended "capping detail"

For further information contact us at: 1.800.552.6376



nov.com/poleproducts

©National Oilwell Varco - All rights reserved - 11478_ENG_v01