

Ameron™

Contemporary Series 1C2 / 0C2 Round Poles

Available in base plate and embedded styles

Our 1C2 and 0C2 poles are ideal for street lighting, recreational areas, parking lots, park security and walkways. Application can be post top or side mounted.

Features and Benefits

- Prestressed steel and highest quality concrete are centrifugally cast for ultimate strength, durability and vibration resistance
- Natural stone and terrazzo aggregates maintain a like new appearance with virtually no maintenance
- Conforms to applicable sections of ACI, AASHTO, ASTM, and IBC standards
- Exclusive 10-year warranty

Colors and Finishes

A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are lightly blasted to expose the texture and color of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amershield™, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

Durability with a classic touch.




For further information contact us at: 1.800.552.6376



nov.com/poleproducts

Ameron™ Contemporary Series 1C2 / 0C2 Round Poles

5" Top O.D.

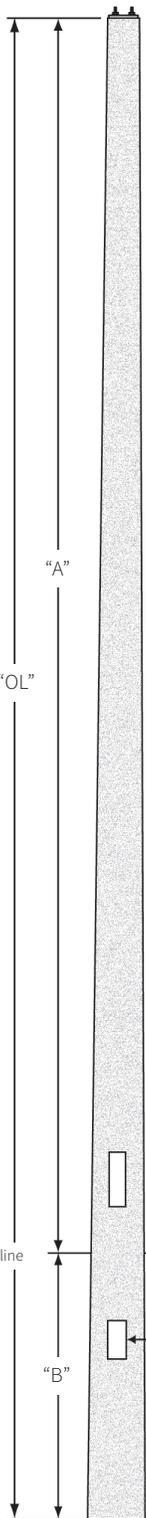

0C2 Embedded Pole

Base Plate Style - Information

Catalog Number	Pole Height "A"	Base O.D.	Anchor Bolt	Bolt Circle	Base Plate (SQ)	Ultimate G.L. Moment (ft. lbs.)	Weight (lbs.)
1C217	17'-1"	7 ³ / ₈ "	1" x 36" x 4"	12 ¹ / ₂ "	14"	16,800	530
1C223	23'-2"	8 ¹ / ₄ "	1" x 36" x 4"	12 ¹ / ₂ "	14"	17,000	780
1C225	25'-4"	8 ¹ / ₂ "	1" x 36" x 4"	12 ¹ / ₂ "	14"	18,600	840
1C230	30'-2"	9 ³ / ₁₆ "	1" x 36" x 4"	12 ¹ / ₂ "	14"	22,500	1,050

Embedded Style - Information

Catalog Number	Pole Height "A"	Bottom Dia.	Embedded Depth "B"	Overall Length "OL"	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
0C217	13'-0"	7 ³ / ₈ "	4'-0"	17'-0"	11,400	510
0C223	18'-10"	8 ¹ / ₄ "	4'-3"	23'-1"	14,800	760
0C225	20'-9"	8 ¹ / ₂ "	4'-6"	25'-3"	16,400	820
0C227	22'-4"	8 ³ / ₄ "	4'-9"	27'-1"	16,700	940
0C230	25'-0"	9 ¹ / ₈ "	5'-0"	30'-0"	19,000	1,030
0C233	27'-9"	9 ⁹ / ₁₆ "	5'-3"	33'-0"	21,100	1,220
0C235	29'-6"	9 ¹³ / ₁₆ "	5'-6"	35'-0"	22,500	1,270


Specifications: Use Contemporary Specifications.

Colors and finishes: See Contemporary Color Selection Guide.


Luminaire mounting: See technical-mounting options section for more information.

Anti-graffiti and sealer: Optional coatings available for added protection.

Embedded Style

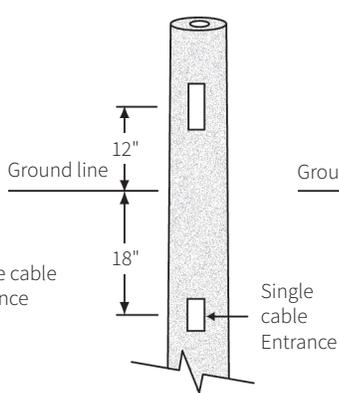


0C2 (17-27) Elevation

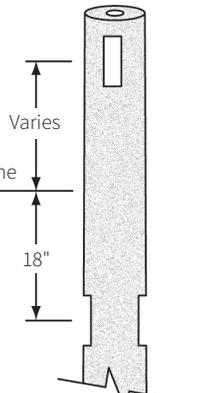


0C2 (30-35) Elevation


Base Plate Style



1C2 Elevation
See recommended "capping details"



0C2 / 1C2 shaft cross section detail



1C2 slotted base plate prestressed to pole

For further information contact us at: 1.800.552.6376

