

# Ameron™

## Washington Pole Embedded

### Available in Centrecon and Contemporary series

In 1910 the Commission of Fine Arts in Washington D.C. designed the simple, classically fluted lighting standard on which the Ameron Washington pole is based. Our version of the classic design is available in durable, low-maintenance, prestressed and spun-cast concrete that retains its beauty for many years even in the most severe weather conditions.

#### Features and Benefits

- Prestressed steel and highest quality concrete are centrifugally cast for ultimate strength and durability.
- Natural stone and terrazzo aggregates maintain a like new appearance with virtually no maintenance.
- Conforms to applicable sections of ACI, AASHTO, ASTM, and IBC standards.
- Exclusive 10-year warranty

#### Colors and Finishes

A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are lightly blasted to expose the texture and color of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amershield™, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

#### Durability with a classic touch.




For further information contact us at: 1.800.552.6376



[poleproducts@nov.com](mailto:poleproducts@nov.com)

[nov.com/poleproducts](http://nov.com/poleproducts)

# Ameron™ Washington Pole - Embedded

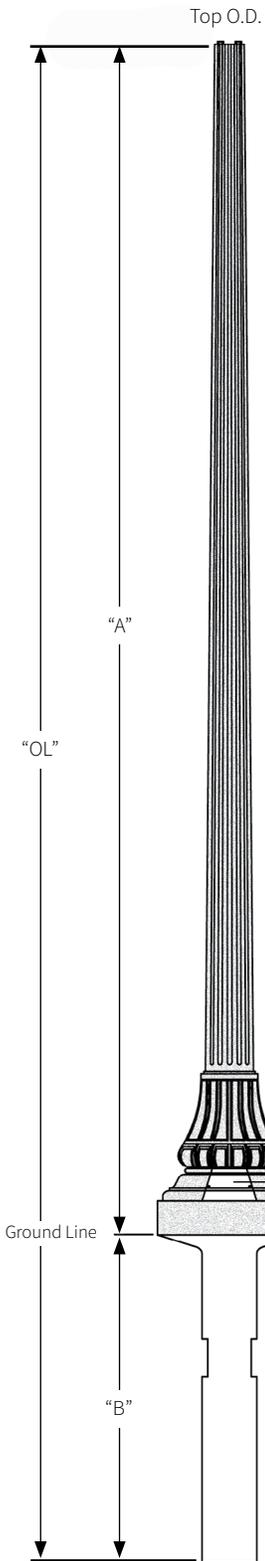

## Embedded Style - Information



Catalog Number	Pole Height "A"	Top O.D.	Base O.D.	Embedded Depth "B"	Overall Length "OL"	Ultimate G.I. Moment (ft. lbs.)	Pole Weight (lbs.)
26ET10	9'-6"	5-3/8"	21"	4'-0"	13'-6"	12,000	710
26ET12	12'-0"	4-3/4"	21"	4'-0"	16'-0"	12,000	740
26ET14	14'-6"	4-1/4"	21"	4'-0"	18'-6"	12,000	770

**Specifications:** Use Contemporary or Centrecon Specifications

**Colors and finishes:** Use Contemporary or Centrecon Color Selection guide

**Luminaire mounting:** See technical-mounting options section for more information

**Anti-graffiti and sealer:** Optional coatings available for added protection

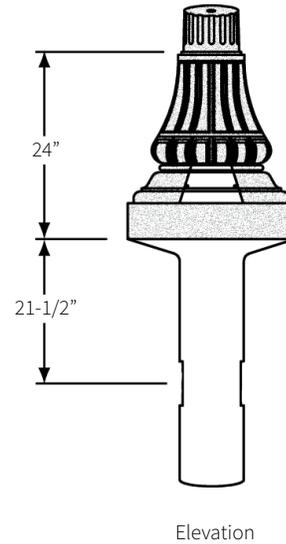

For further information contact us at: 1.800.552.6376



poleproducts@nov.com

nov.com/poleproducts

© 2018 National Oilwell Varco - All rights reserved - 12857\_ENG\_v01